

Sequential quantum-enhanced measurement with an atomic ensemble

A.V. Lebedev,¹ P. Treutlein,² and G. Blatter¹

¹*Theoretische Physik, Wolfgang-Pauli-Strasse 27, ETH Zurich, CH-8093 Zürich, Switzerland*

²*Department of Physics, University of Basel, Klingelbergstrasse 82, CH-4056 Basel, Switzerland*
(Dated: April 9, 2013)

We propose a quantum-enhanced iterative (with K steps) measurement scheme based on an ensemble of N two-level probes which asymptotically approaches the Heisenberg limit $\delta_K \propto R^{-K/(K+1)}$, R the number of quantum resources. The protocol is inspired by Kitaev's phase estimation algorithm and involves only collective manipulation and measurement of the ensemble. The iterative procedure takes the shot-noise limited primary measurement with precision $\delta_1 \propto N^{-1/2}$ to increasingly precise results $\delta_K \propto N^{-K/2}$. A straightforward implementation of the algorithm makes use of a two-component atomic cloud of Bosons in the precision measurement of a magnetic field.

PACS numbers: 06.20.-f, 03.67.Ac, 03.65.Ta

Estimating an unknown parameter ϕ of a quantum system usually involves a quantum probe prepared in a known state $\hat{\rho}_0$ which, when brought into interaction with the system, evolves to a new state $\hat{\rho}_\phi$ under the action of a (so-called) quantum channel¹ $\mathcal{Q}_\phi$, $\hat{\rho}_0 \rightarrow \mathcal{Q}_\phi(\hat{\rho}_0) = \hat{\rho}_\phi$; by measuring a suitable observable of the probe in the state $\hat{\rho}_\phi$, one can infer the value of ϕ . Due to the fundamental uncertainty of the quantum measurement, this information has a statistical character. In order to improve the knowledge on ϕ , one needs to repeat the measurement: measuring $R \gg 1$ independent quantum probes $\hat{\rho}_0^{\otimes R} \rightarrow [\mathcal{Q}_\phi(\hat{\rho}_0)]^{\otimes R} = \hat{\rho}_\phi^{\otimes R}$ leads to a $\sqrt{R}$ increase in the measurement precision $\delta_0 \rightarrow \delta_0/\sqrt{R}$ —this is the standard quantum limit or shot-noise limit of measurement. Incidentally, nature provides us with a better, albeit ultimate², Heisenberg limit $\delta_0 \rightarrow \delta_0/R$, if one exploits some of the quantum resources of the system under investigation. Exploiting such quantum effects enhancing the measurement precision is the subject of quantum metrology^{1,3}.

The quantum enhancement in the measurement precision can be approached by using either *parallel* or *sequential* strategies⁴. In a parallel strategy, the original ensemble is divided into m sub-ensembles with n probes, $R = nm$, with each sub-ensemble prepared in a (maximally) entangled state $[\hat{\rho}_0^{(n)}]^{\otimes m} \rightarrow [\mathcal{Q}_\phi(\hat{\rho}_0^{(n)})]^{\otimes m}$; this results (ideally) in a $\sqrt{n}$ enhancement of the precision compared to the standard quantum limit, $\delta_0 \rightarrow \delta_0/\sqrt{m}n = \delta_0\sqrt{m}/R$, see Refs. 5 for the case of quantum interferometry and Refs. 6 for a general quantum channel. Alternatively, in a sequential strategy, instead of preparing entangled states, each of m separate probes is passed n times through the same quantum channel, $\hat{\rho}_0^{\otimes m} \rightarrow [\mathcal{Q}_\phi^n(\hat{\rho}_0)]^{\otimes m}$, resulting in the same enhancement in precision, see Refs. 7. Roughly speaking, while parallel strategies make use of entanglement, sequential strategies exploit the coherent quantum dynamics as a resource in order to enhance measurement precision. While the sequential strategies do not require creation of rather fragile entangled states, they do demand longer (coherence) times to allow for the completion of the measurement.

Recently, quantum measurement protocols were implemented using two-component atomic ensembles with N particles^{9–11}. In Ref. 9, interatomic interactions were used to create entangled, spin-squeezed states¹² of Bose-Einstein condensates (BECs) that allow one to go beyond the standard quantum limit via a parallel strategy. Here, we suggest a sequential strategy without entanglement allowing to reach a given precision δ within $K \sim \ln(\delta_1/\delta)/\ln(\sqrt{N})$ steps, where $\delta_1 = \delta_0/\sqrt{N}$ is the uncertainty of the primary measurement and $N \gg 1$ is the BEC atom number. This is achieved by subjecting the BEC on each subsequent measurement step to a $\sim \sqrt{N}$ -fold longer evolution under the unknown external field. Our approach resembles Kitaev's phase estimation algorithm¹³, however, it requires far less steps to complete the measurement due to our exploiting the large ensemble N of individual probes in the atom cloud. Our approach does not require any separate access to a particular atom in the BEC and relies only on collective manipulations and measurements.

Primary measurement. We wish to estimate the real angle (or phase¹⁴) $\phi \in [-\pi, \pi]$ in an unknown unitary rotation $\hat{U}_z[\phi] = \exp[-i\hat{\sigma}_z\phi/2]$ given an ensemble (with $N \gg 1$ probes) of spin-1/2 systems (qubits) and using only *collective* unitary operations over the ensemble. We use Ramsey interferometry as the primary measurement and prepare all qubits in the $\hat{\sigma}_x = 1$ polarized state $(|\uparrow\rangle + |\downarrow\rangle)/\sqrt{2}$. Applying $\hat{U}_z[\phi]$ to the ensemble results in the state $[(e^{-i\phi/2}|\uparrow\rangle + e^{+i\phi/2}|\downarrow\rangle)/\sqrt{2}]^{\otimes N}$. A $\hat{U}_y[-\pi/2]$ pulse rotates the ensemble into the read-out state $[\cos(\phi/2)|\uparrow\rangle + i\sin(\phi/2)|\downarrow\rangle]^{\otimes N}$ and measuring the total polarization $\hat{S}_z = (1/N) \sum_{i=1}^N \hat{\sigma}_z^{(i)}$, one arrives at one of the possible outcomes $S_z = [N_+ - N_-]/N$, with $N_+ \in \{0, \dots, N\}$ and $N_- = N - N_+$ the number of qubits observed in the $\sigma_z = \pm 1$ states. The probability to observe a particular value $\tilde{S}_z$ (we denote by $\tilde{X}$ a realized value of the random variable X) is given by the Bernoulli distribution

$$\mathcal{P}(S_z = \tilde{S}_z|\phi) = \frac{N!}{\tilde{N}_+! \tilde{N}_-!} \left(\cos^2 \frac{\phi}{2}\right)^{\tilde{N}_+} \left(\sin^2 \frac{\phi}{2}\right)^{\tilde{N}_-}, \quad (1)$$

conditioned on the unknown value of ϕ . Starting with an unbiased, homogeneous distribution $P(\phi)$ for the parameter ϕ (no *a priori* knowledge on ϕ), the measurement of a particular value of $\tilde{S}_z$ allows us to improve our statistical information on ϕ . Changing variables $\phi \rightarrow p = \cos \phi$ and making use of Bayes' theorem, the *a posteriori* probability distribution $P(p|\tilde{S}_z)$ of $p \in [-1, 1]$ knowing the measured result $\tilde{S}_z$ is enhanced by the factor $\mathcal{P}(S_z = \tilde{S}_z|\phi)/\mathcal{P}(S_z)$, hence, after proper normalization,

$$P(p|\tilde{S}_z) = \frac{(N+1)!}{2\tilde{N}_+!\tilde{N}_-!} \left(\frac{1+p}{2}\right)^{\tilde{N}_+} \left(\frac{1-p}{2}\right)^{\tilde{N}_-}. \quad (2)$$

In the following, we consider the limit of large $\tilde{N}_+$, $\tilde{N}_- \gg 1$, where the distribution $P(p|\tilde{S}_z)$ has a sharp peak near $\tilde{S}_z$; expanding the exponent in $\exp[\tilde{N}_+ \ln(1+p) + \tilde{N}_- \ln(1-p)]$ around the maximum, the distribution $P(p|\tilde{S}_z)$ then can be replaced by the normal distribution

$$P(p|\tilde{S}_z) = \frac{1}{\sqrt{2\pi}\sigma} \exp\left[-\frac{(p - \tilde{S}_z)^2}{2\sigma^2}\right], \quad \sigma^2 = \frac{1 - \tilde{S}_z^2}{N}, \quad (3)$$

or in another notation, $p \sim \mathcal{N}(\tilde{S}_z, \sigma^2)$. The overall result of the above ensemble measurement is summarized in the following statistical statement: Given the tolerance level $\beta \ll 1$, the precision of the estimate $p \approx \tilde{S}_z$ is given by

$$\text{Prob}[|p - \tilde{S}_z| \leq g(\beta)\sigma] = 1 - \beta, \quad (4)$$

with g determined by $1 - \beta = \text{erf}(g/\sqrt{2})$ and $\text{erf}(x) = (1/\sqrt{\pi}) \int_{-x}^x dt e^{-t^2}$ is the standard error function. Finally, the distribution (3) for $p = \cos \phi$ provides us with the distribution function for the angle ϕ ,

$$P(\phi|\tilde{S}_z) = \frac{|\sin \phi|}{2\sqrt{2\pi}\sigma} \exp\left[-\frac{(\cos \phi - \tilde{S}_z)^2}{2\sigma^2}\right]. \quad (5)$$

Complementary measurement. Since $\cos \phi$ is even in ϕ , the estimate for ϕ is distributed among two symmetric intervals $|\phi \pm \tilde{\phi}| \leq g/\sqrt{N}$ with $\tilde{\phi} = |\arccos(\tilde{S}_z)|$. Expanding (5) near $\phi \approx \pm\tilde{\phi}$, the distribution of ϕ is given by the sum of two normal distributions,

$$\phi \sim \frac{1}{2} \sum_{\alpha=\pm 1} \mathcal{N}(\alpha\tilde{\phi}, \sigma_1^2), \quad \sigma_1 = \frac{1}{\sqrt{N}}, \quad (6)$$

describing two equiprobable alternatives $\alpha = \pm 1$ for the angle ϕ to be located near $\alpha\tilde{\phi}$. In order to distinguish between the two alternatives of the primary measurement, we perform a second test by preparing the ensemble in the $\sigma_y = +1$ polarized state, $(|\uparrow\rangle + i|\downarrow\rangle)/\sqrt{2}$. Repeating the Ramsey measurement, the second estimate for the parameter $p' = \sin \phi$ should result in either $+\sin \tilde{\phi}$ or $-\sin \tilde{\phi}$, thus distinguishing the alternatives $+\tilde{\phi}$ and $-\tilde{\phi}$ provided by the first measurement. Specifically, given the probability to observe a qubit in the $\sigma_z = \pm 1$ state conditioned on the result $\alpha\tilde{\phi}$ of the primary measurement

$$\begin{aligned} \mathcal{P}(\hat{\sigma}_z = \pm 1|\alpha\tilde{\phi}) &= \frac{1}{2} \int d\phi \frac{1 \pm \sin \phi}{2} \sum_{\alpha=\pm 1} \mathcal{N}(\alpha\tilde{\phi}, \sigma_1^2) \\ &\approx [1 \pm (\alpha \sin \tilde{\phi} - \sin^2 \tilde{\phi}/2N)]/2, \end{aligned} \quad (7)$$

we find that the total polarization of the complementary ensemble is given by the sum of two normal distributions, $S'_z \sim \sum_{\alpha} \mathcal{N}(S'_{z\alpha}, \sigma'^2)/2$, with mean and variance

$$S'_{z\alpha} \approx \alpha \sin \tilde{\phi} - \frac{\sin^2 \tilde{\phi}}{2N}, \quad \sigma'^2 \approx \frac{\cos^2 \tilde{\phi}}{N'}. \quad (8)$$

To construct an unbiased classification rule we define the regions $E_- = \{S'_z | S'_z < \tilde{S}'_z\}$ and $E_+ = \{S'_z | S'_z > \tilde{S}'_z\}$ with the boundary $\tilde{S}'_z$ set by the condition

$$\mathcal{P}(E_-) \equiv \int_{-\infty}^{\tilde{S}'_z} dS'_z P(S'_z) = \mathcal{P}(E_+) = 1/2. \quad (9)$$

In our symmetric situation, $\tilde{S}'_z = (S'_{z-} + S'_{z+})/2$. Given a measured $\tilde{S}'_z$ we then assign the value $\alpha = 1$ ($\alpha = -1$) whenever the event has been realized in E_+ (E_-). This assignment is prone to a *misclassification* error $\beta' = \mathcal{P}(+|E_-)\mathcal{P}(E_-) + \mathcal{P}(-|E_+)\mathcal{P}(E_+)$, where the conditional probability $\mathcal{P}(+|E_-) = \mathcal{P}(E_-|+)\mathcal{P}(+)/\mathcal{P}(E_-)$ (and similar for $\mathcal{P}(-|E_+)$) follows from Bayes' theorem; for our unbiased classification rule, this reduces to $\mathcal{P}(\alpha'|E_\alpha) = \mathcal{P}(E_\alpha|\alpha')$. The conditional probabilities $\mathcal{P}(E_\alpha|\alpha')$ are easily obtained from the distributions $\mathcal{P}(S'_z|\alpha) = \mathcal{N}(S'_{z\alpha}, \sigma'^2)$ and we find that

$$\beta' = [1 - \text{erf}(|\sin \tilde{\phi}|/\sqrt{2}\sigma')]/2. \quad (10)$$

Away from the immediate vicinity of $\tilde{\phi} \approx 0$ (e.g., $\tilde{N}_+ > 5$) and a typical number of probes $N \sim 10^3$, choosing $N' \sim N$ results in a negligible probability β' of misclassification.

n-fold rotation. Next, we analyze the sequential ($n > 1$ -fold) application of the rotation $\hat{U}_z[\phi]$ in the Ramsey measurement. Measuring the ensemble polarization $\tilde{S}_z$ then provides an estimate for the parameter $\phi_n = n\phi$. Given a measured result $\tilde{S}_{zn}$, the *a posteriori* distribution function for the parameter ϕ_n is given by Eq. (5) with $\tilde{S}_z \rightarrow \tilde{S}_{zn}$ and $\phi \rightarrow \phi_n$, providing two Gaussian peaks at $\tilde{\phi}_n = \pm |\arccos(\tilde{S}_{zn})|$ of width $\propto 1/\sqrt{N}$ as a function of ϕ_n ; the accompanying complementary measurement again selects one alternative $\alpha = \pm 1$.

A further estimate of the angle ϕ is obtained by reading the distribution function Eq. (5) with $\cos \phi \rightarrow \cos(n\phi)$ as a function of ϕ . The periodicity of $\cos(n\phi)$ provides n different values of ϕ , all corresponding to the same value of $\cos(n\phi)$. The distribution function $P_n(\phi)$ for the angle ϕ then has n peaks centered at $\tilde{\phi}_{nk}$,

$$\phi \sim \frac{1}{n} \sum_{k=0}^{n-1} \mathcal{N}(\tilde{\phi}_{nk}, \sigma_n^2), \quad \sigma_n = \frac{\sigma_1}{n}, \quad (11)$$

$$\tilde{\phi}_{nk} = \frac{\tilde{\phi}_n}{n} + 2\pi \frac{k}{n}, \quad k = 0, \dots, n-1, \quad (12)$$

each peak n times narrower than in the previous $n = 1$ case. As a result, the n -fold measurement redistributes the original uncertainty $\delta_1 \sim \sigma_1$ among n different equiprobable positions which we call the alternatives A_k . While this result does not give us more a

posteriori information on the position of ϕ than the 1-fold measurement (as confirmed by the Shannon entropy $H_n = -\int d\phi P_n(\phi) \ln P_n(\phi)$ coinciding for all n), the different distribution of the probability allows us to gain in precision when combining the two measurements.

Beyond the shot noise limit. In order to take advantage of the n -fold measurement one has to identify the correct alternative among the n equiprobable distributions, see Eq. (11). This is done by combining the results of the 1- and n -fold measurements. We define the interval $I_1 = \{\phi | |\phi - \tilde{\phi}_1| \leq g(\beta)\sigma_1\}$ centered around the result $\tilde{\phi}_1$ of the first measurement, see Fig. 1, with β the tolerance level of the first measurement, hence $\text{Prob}[|\phi - \tilde{\phi}_1| \leq g(\beta)\sigma_1] = 1 - \beta$, cf. Eq. (4). We call the alternative A_k compatible with the first measurement if the condition

$$\text{Prob}[\phi \in I_1 | \phi \sim \mathcal{N}(\tilde{\phi}_{nk}, \sigma_n^2)] \geq 1 - \beta \quad (13)$$

is satisfied. In order to satisfy the original confidence level in the second measurement, the maximum $\tilde{\phi}_{nk}$ belonging to A_k must be located within the reduced interval $I_1^< = \{\phi | |\phi - \tilde{\phi}_1| \leq g(\beta)(\sigma_1 - \sigma_n)\}$, see Fig. 1.

By construction, the condition (13) is satisfied for at least one k , irrespective of the value of n . Choosing a small n , the gain in precision is small, hence we are interested in maximizing the value of n . On the other hand, for large n , the number of peaks compatible with Eq. (13) is larger than one and we cannot select the proper alternative A_k . The optimal number n_{opt} can be determined by considering the situation where the k -th peak is located at the left boundary of $I_1^<$, $\tilde{\phi}_{nk} = \tilde{\phi}_1 - g(\beta)(\sigma_1 - \sigma_n)$, while the next peak ϕ_{nk+1} is being pushed out from $I_1^<$ across the right boundary of $I_1^<$ with decreasing n , see Fig. 1. Obviously, when $\tilde{\phi}_{nk+1} = \tilde{\phi}_1 + g(\beta)(\sigma_1 - \sigma_n)$ we still have two equally probable alternatives generating a large misclassification error $\tilde{\beta} = 1/2$. The task then is, to find the largest possible n compatible with a prescribed error $\tilde{\beta} \ll 1$.

After two measurements, a 1- and a n -fold, the *a posteriori* distribution function for the angle ϕ is given by,

$$P(\phi | \tilde{\phi}_1, \tilde{\phi}_n) \propto \sum_{k=0}^{n-1} \frac{w_k}{\sqrt{2\pi} \sigma_{1,n}} \exp\left[-\frac{(\phi - \tilde{\phi}_{1,nk})^2}{2\sigma_{1,n}^2}\right], \quad (14)$$

with $\tilde{\phi}_{1,nk} = (\tilde{\phi}_1^2 \sigma_n^2 + \tilde{\phi}_{nk}^2 \sigma_1^2)/(\sigma_1^2 + \sigma_n^2) \approx \tilde{\phi}_{nk}$, $\sigma_{1,n} = \sigma_1 \sigma_n / \sqrt{\sigma_1^2 + \sigma_n^2} \approx \sigma_n$, and w_k is the *a posteriori* probability that the k -th alternative has been realized,

$$w_k = \exp\left[-\frac{(\tilde{\phi}_1 - \tilde{\phi}_{nk})^2}{2(\sigma_1^2 + \sigma_n^2)}\right]. \quad (15)$$

For our arrangement $\tilde{\phi}_{nk} = \tilde{\phi}_1 - g(\beta)(\sigma_1 - \sigma_n)$ and $\tilde{\phi}_{nk+1} = \tilde{\phi}_1 - g(\beta)(\sigma_1 - \sigma_n) + \Delta_n$. Considering only these two peaks, the misclassification error of the k -th alternative is given by $\tilde{\beta} = w_{k+1}/(w_k + w_{k+1})$. Solving for Δ_n , we obtain the optimal number of rotations compatible with $\tilde{\beta}$, $n \leq n_{\text{opt}} = \lfloor \nu(\beta, \tilde{\beta})/\sigma_1 \rfloor \equiv n_2$ with

$$\nu = \pi g(\beta) \frac{\sqrt{1 + 2 \ln[(1 - \tilde{\beta})/\tilde{\beta}]/g^2(\beta)} - 1}{\ln[(1 - \tilde{\beta})/\tilde{\beta}]} \quad (16)$$

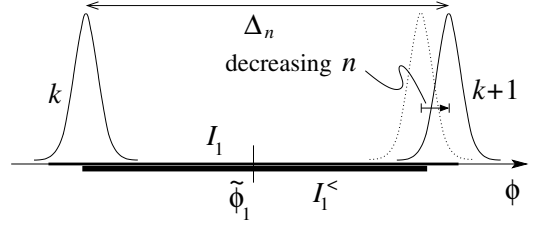


FIG. 1: Intervals I_1 and $I_1^<$ centered around $\tilde{\phi}_1$. The peaks belonging to the alternatives A_k and A_{k+1} are shown for the extreme case where $\tilde{\phi}_{nk}$ coincides with the left boundary and $\tilde{\phi}_{nk+1}$ is on the verge of leaving $I_1^<$ as n decreases, $\Delta_n = 2\pi/n$.

In the end, the precision estimate of two measurements with a 1-fold and a n_2 -fold rotation is given by

$$\text{Prob}[|\phi - \tilde{\phi}_2| \leq g(\beta)\sigma_2] = (1 - \beta)(1 - \tilde{\beta}), \quad (17)$$

where $\tilde{\phi}_2$ is the measured and selected value of the parameter ϕ on the second step and the error bar is given by $\sigma_2 \equiv \sigma_{n_2} = \sigma_1/n_2$. Thus the second measurement improves the precision by the large factor $\sqrt{N}\nu(\beta, \tilde{\beta}) \gg 1$, with $\nu(\beta, \tilde{\beta}) \approx 0.96$ for $\beta = \tilde{\beta} = 0.01$ (for small $\beta, \tilde{\beta} \ll 1$, $\nu \approx (\pi\sqrt{2|\ln \beta|})/|\ln \tilde{\beta}|[(1 + \ln \tilde{\beta}/\ln \beta)^{1/2} - 1]$). The K -fold iteration of this procedure will further improve the precision of the measurement.

The above measurement protocol involves two sources of error, the *estimation error* β for the angle ϕ to lie outside the interval $|\phi - \tilde{\phi}_2| \leq g(\beta)\sigma_2$, and the *classification error* $\tilde{\beta}$ for an incorrect choice of the alternative A_k . While an estimation error can be ruled out on a subsequent step, this is not the case for a classification error. Indeed, for $K = 2$ and assuming that we have correctly identified the peak $\tilde{\phi}_{nk} = \tilde{\phi}_2$, let us suppose that $|\phi - \tilde{\phi}_2| > g(\beta)\sigma_2$, hence the true value ϕ is outside the allowed range. Applying $n_3 = \nu/\sigma_2$ rotations in the next step, none of the peaks $\tilde{\phi}_{n_3k}$ will belong to the interval $\tilde{I}_2$ defined through $|\phi - \tilde{\phi}_2| \leq g(\beta)(\sigma_2 - \sigma_3)$ with probability $1 - \beta$, signalling the error in one of the previous steps. The classification error cannot be caught in subsequent steps: Consider two alternative angles ϕ localized either near a) the k -th peak $|\phi - \tilde{\phi}_{n_2k}| \leq g(\beta)\sigma_2$ or b) the next peak $|\phi - (\tilde{\phi}_{n_2k} + 2\pi/n_2)| \leq g(\beta)\sigma_2$. Then applying a n_3 -fold rotation, the random parameter $\phi_3 = n_3\phi$ will be localized within a) $|\phi_3 - n_3\phi_{n_2k}| \leq g(\beta)\nu$, or b) $|\phi_3 - n_3\phi_{n_2k} - 2\pi\nu\sqrt{N}| \leq g(\beta)\nu$. Since these intervals are largely overlapping, the hypotheses a) and b) cannot be distinguished.

Iterating the process K times, our measurement protocol satisfies the confidence criterion

$$\text{Prob}[|\phi - \tilde{\phi}_K| \leq g(\beta)\sigma_K] = (1 - \beta)(1 - \tilde{\beta})^{K-1}, \quad (18)$$

with $\sigma_K = \sigma_1[\sigma_1/\nu]^K \sim N^{-K/2}$. To reach a given precision δ one then needs to perform $K_\delta \sim 1 + \ln(\sigma_1 g(\beta)/\delta)/\ln(\nu\sqrt{N})$ steps; at the same time, the overall confidence level decreases exponentially $\propto \exp(-\tilde{\beta}K_\delta)$

with the number K_δ of steps. Moreover, an estimation error, i.e., none of the peaks belongs to the prescribed estimation interval, forces one to repeat the entire procedure again. However, in practice $\sqrt{N} \sim 30 - 40$ and thus hardly more than a few steps are required to reach a good precision δ .

In counting the number of resources needed to reach the estimate (18), we choose as our basic unit the operation $\hat{U}_z[\phi]$ applied to a single qubit. The i -th step of the above procedure requires (for N qubits in the ensemble) $R_i = Nn_i = N(\nu/\sigma_1)^{i-1} = \nu^{i-1} N^{(i+1)/2}$ elementary operations. For $\nu/\sigma_1 \gg 1$, the entire K -step process then involves $R = \sum_{i=1}^K R_i \approx R_K$ operations. Expressing the prescribed precision δ_K ($\approx g\sigma_K = g\sigma_1[\sigma_1/\nu]^{K-1}$) through the number R of resources, we arrive at the scaling

$$\delta_K = \frac{g(\beta)}{[\nu(\beta, \tilde{\beta})]^{\frac{K-1}{K+1}}} \frac{1}{R^{\frac{K}{K+1}}} \sim \frac{\delta_0}{N^{K/2}}, \quad (19)$$

telling us that the Heisenberg limit is reached asymptotically at large values of K . In an actual implementation with ultracold atoms, the time needed to prepare the atomic ensemble is typically a few seconds⁹, and increasing the number of rotations n does not significantly increase the overall duration of the measurement. The standard statistical measurement requires $K_{\text{std}} \sim (\delta_0/\sqrt{N}\delta)^2$ preparations to reach a precision δ , which is exponentially larger than the K_δ preparations required with the present protocol, $K_{\text{std}} \sim N^{K_\delta-2}$.

Dephasing. In addition to the unitary rotation $\hat{U}_z[\phi]$, the qubits may experience a stochastic field $\varphi(t)$, e.g. due to uncontrolled interactions between qubits generating a different phase shift $\phi \rightarrow \phi + \int dt \varphi(t)$ for each qubit. Averaging the single-qubit density matrix over $\varphi(t)$, the off diagonal amplitudes $\epsilon \exp(\pm i\phi)$ are reduced by the factor $\epsilon = \exp(-\Gamma\tau_1/2) < 1$, where we have assumed a Gaussian random field $\langle \varphi(t)\varphi(t') \rangle = \Gamma\delta(t-t')$ and τ_1 is the exposure time of the primary measurement; the reduction in these amplitudes after an n -fold rotation is given by ϵ^n . The measurement of the ensemble polarization involves the parameter $p = \epsilon^n \cos(n\phi)$ and the width in the *a posteriori* distribution function is $\sigma_n \rightarrow \sigma_1/(n\epsilon^n)$. The smallest attainable width $\sigma_1 e \ln(1/\epsilon)$ is reached after $n_c = -1/\ln \epsilon = \tau_c/\tau_1$ steps, with $\tau_c = 2/\Gamma$ the coherence time.

Application. We analyze the use of our protocol to measure a constant magnetic field B with an atomic ensemble, considering a transition with differential magnetic moment of order μ_B , the Bohr magneton. Assuming the prior knowledge that $B < B_+$, we choose the interro-

gation time of the first Ramsey sequence $\tau_1 \sim 2\pi\hbar/\mu_B B_+$ such that the accumulated phase $\phi = \mu_B B\tau_1/\hbar$ does not exceed 2π . This primary measurement results in a phase uncertainty of $[\delta\phi]_1 = 1/\sqrt{N}$, translating to a precision of $[\Delta B]_1 = \hbar/\mu_B\tau_1\sqrt{N}$ in the field. In the following steps, the Ramsey time is increased as described above. The longest Ramsey sequence of duration $\tau_c = n_c\tau_1$ provides us with a precision of $[\delta\phi]_{\text{min}} = 1/n_c\sqrt{N}$ for the phase estimation, and thus a field precision of $[\Delta B]_{\text{min}} = \hbar/\mu_B\tau_c\sqrt{N}$ using $K \sim 1 + \ln(\tau_c/\tau_1)/\ln(\sqrt{N})$ steps.

In a realistic situation the above procedure is feasible for small magnetic fields, since the duration τ_1 of the first Ramsey sequence cannot be arbitrarily small—a typical $\tau_1 \sim 10^{-6}$ s corresponds to a field $B_+ \sim 1$ G. With a typical coherence time $\tau_c \sim 1$ s and $N \sim 1000$ atoms one arrives after $K = 5$ steps at a precision $\Delta B \sim 3 \times 10^{-9}$ G. In order to measure higher fields one can exploit the phase periodicity and subtract an offset field. This requires prior knowledge that the field lies in an interval $[B_-, B_+]$. In this case, given a minimal time τ_1 , we choose some field $B_0 \in [B_-, B_+]$ that satisfies the matching relation $\mu_B B_0\tau_1/\hbar = 2\pi M$ with M the largest possible integer. The procedure described above is then used to measure the remaining small field $b = B - B_0$.

Conclusion. It is interesting to compare our ensemble-based algorithm with Kitaev's original phase estimation algorithm involving individual qubits. In order to reach a prescribed precision δ , the latter necessitates $K \sim \ln(1/\delta)/\ln 2$ steps, a factor $(\ln \sqrt{N})/\ln 2$ larger than the ensemble-based protocol. For the Kitaev algorithm, the resources scale as $\delta \sim \ln R/R$ (accounting for the fact that a final error probability β necessitates a smaller value β/K for the individual step¹³), which is better than our algebraic relation $\delta \sim R^{-K/(K+1)}$. Still, performing a few iterations on an ensemble of $N \sim 10^3$ atoms with long coherence time appears as an attractive and practical alternative to control isolated qubits over many steps.

The sequential strategy discussed here is particularly useful in scanning probe measurements of a spatially varying field¹⁰. If the field distribution is *a priori* unknown, the duration of the initial Ramsey sequence has to be very short at each pixel of the image. Our scheme allows to optimally adapt the sequence at each pixel to reach fast reduction in the measurement uncertainty. This dramatically reduces the overall time to record a picture with a given precision. Finally, our ensemble-based sequential strategy could also be combined with a parallel strategy using squeezed BECs.

We acknowledge fruitful discussions with Gordey Lesovik and Tilman Esslinger and financial support from the Swiss National Foundation through the NCCR QSIT.

¹ V. Giovannetti, S. Lloyd, and L. Maccone, Nature Photonics **5**, 222 (2011); V. Giovannetti, S. Lloyd, and L. Maccone, Science **306**, 1330 (2004).

² D.W. Berry, M.J.W. Hall, M. Zwierz, and H.M. Wiseman, Phys. Rev. A **86**, 053813 (2012); V. Giovannetti, S. Lloyd, and L. Maccone, Phys. Rev. Lett. **108**, 260405 (2012).

- ³ C.W. Helstrom, *Quantum Detection and Estimation Theory* (Academic Press, New York, 1976).
- ⁴ V. Giovannetti, S. Lloyd, and L. Maccone, Phys. Rev. Lett. **96**, 010401 (2006).
- ⁵ C.M. Caves, Phys. Rev. D **23**, 1693 (1981); D.J. Wineland, J.J. Bollinger, W.M. Itano, and F.L. Moore, Phys. Rev. A **46**, R6797 (1992); M.J. Holland and K. Burnett, Phys. Rev. Lett. **71**, 1355 (1993).
- ⁶ A. Fujiwara, Phys. Rev. A **63**, 042304 (2001); D.G. Fischer, H. Mack, M.A. Cirone, and M. Freyberger, Phys. Rev. A **64**, 022309 (2001); M. Sasaki, M. Ban, and S.M. Barnett, Phys. Rev. A **66**, 022308 (2002).
- ⁷ A. Luis, Phys. Rev. A **65**, 025802 (2002); T. Rudolph and L. Grover, Phys. Rev. Lett. **91**, 217905 (2003); M. de Burgh and S.D. Bartlett, Phys. Rev. A **72**, 042301 (2005); B.L. Higgins, D.W. Berry, S.D. Bartlett, H.M. Wiseman, and G.J. Pryde, Nature **450**, 393 (2007); W. van Dam, G.M. D'Ariano, A. Ekert, C. Macchiavello, and M. Mosca, Phys. Rev. Lett. **98**, 090501 (2007).
- ⁸ S.F. Huelga, C. Macchiavello, T. Pellizzari, and A.K. Ekert, Phys. Rev. Lett. **79**, 3865 (1997); J. Koodynski and R. Demkowicz-Dobrzanski, Phys. Rev. A **82**, 053804 (2010).
- ⁹ C. Gross, T. Zibold, E. Nicklas, J. Estève, and M.K. Oberthaler, Nature **464**, 1165 (2010); M.F. Riedel, P. Böhi, Y. Li, T.W. Hänsch, A. Sinatra, and P. Treutlein, Nature **464**, 1170 (2010).
- ¹⁰ C.F. Ockeloen, R. Schmied, M.F. Riedel, and P. Treutlein, arXiv:1303.1313 (2013).
- ¹¹ A. Louchet-Chauvet, J. Appel, J.J. Renema, D. Oblak, N. Kjaergaard, and E.S. Polzik, New J. Phys. **12**, 065032 (2010); I. Leroux, M. Schleier-Smith, and V. Vuletic, Phys. Rev. Lett. **104**, 250801 (2010).
- ¹² M. Kitagawa and M. Ueda, Phys. Rev. A **47**, 5138 (1993).
- ¹³ A.Y. Kitaev, Electr. Coll. Comput. Complex. **3**, (1996); Z. Ji, G. Wang, R. Duan, Y. Feng, and M. Ying, IEEE Trans. Inf. Theory **54**, 5172 (2008).
- ¹⁴ Multiple winding of the phase ϕ is excluded, reflecting some prior knowledge on the unknown field; otherwise, our protocol estimates ϕ only modulo 2π .